

**Tilting
System
AT30L**

Specifications AT30L

Lifting capacity	300kg
Power requirement	240V (single phase) 50 Hz
Standard Platform dimensions	155 x 130 cm
Small Platform dimensions	155 x 90 cm
Hoisting speed	13 m/min
Max. mast height	40 m
Transport dimensions*	100 x 179 x 183 cm (l x w x h)
Weight basic machine*	ca. 550 kg
Weight mast element	ca. 45 kg
Motor capacity	1.5 kW

*Not including tilting system and mast

**Rentals and Sales
08 9248 3255**



De Jong Hoists (AUS)
11 Harris Road
Malaga WA 6090

Telephone
08 9248 3255

Facsimile
08 9248 7845

info@dejonghoists.com.au

www.dejonghoists.com.au

**The Height Advantage
De Jong Hoists
Rack and Pinion
Tilting System AT30L Hoist**

**Easy to install
Easy to transport**

**Single Phase 300kg Hoist
Large hoist platform**



**DE JONG
HOISTS (AUS)**

The AT30L is a compact and versatile hoist capable of lifting 300kg with a single phase motor and ideal for sites where power supply is limited. It is easy to transport with a removable tilting system; compact enough to install into a small area; and offers a large platform.



Easy to position and install



Rack and Pinion is an Advantage

The Rack and Pinion system has fewer moving parts than a cable hoist, and provides safe, dependable high speed hoisting. A reliable and powerful single phase 1.5kW 240V motor is attached to the lift cage, directly driving heavy duty pinion gear to move it along a reciprocal rack in the mast. The rack and pinion drive engages a built-in brake in the motor controlling exact floor stops. An additional gravity powered braking system using centrifugal force is included as a standard safety feature.



Large Hoist Platform

The AT30L offers a 155cm x 130cm lifting platform, wide enough to transport all your gear with room to manoeuvre. The steel platforms are fully enclosed, and are fitted with electrically secured ramps bridging access to the building floor and easy loading at ground level. Options include lockable base fences around the hoist, programmable floor-stops and a small platform.



Easy, Flexible and Dependable


The removable tilting transport system makes the De Jong AT30L the natural choice for all builders. The tilt system allows the hoist to be packaged and transported in a simple 'hitch-and-tow' configuration. Installation is very fast and easy: simply unhitch, wheel into place, and tilt upright. With the tilt system removed the AT30L can be used in tight corners, such as stair-wells and cavities. Optional 1.5m mast sections can extend the hoist height to 40 metres.



Simple hitch and tow transport



Large platform with room to manoeuvre

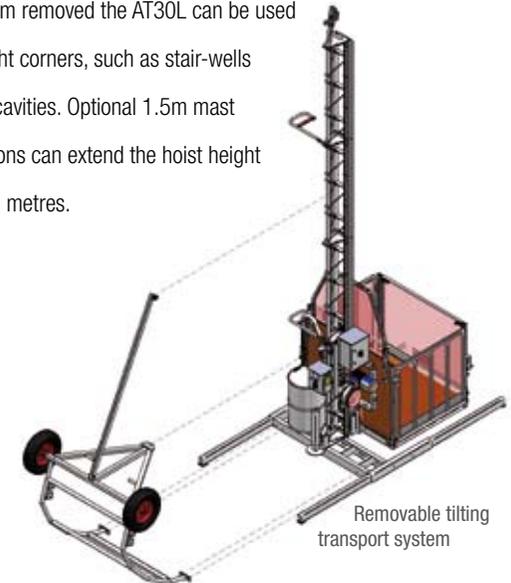

Removable tilting transport system

That's The De Jong Height Advantage